

AD 2.EHGG-ADC

**AD ELEV 17 ft AMSL**


PHYSICAL CHARACTERISTICS				DECLARED DISTANCES				
RWY GEO	DIRECTION	DIMENSIONS (m)	SURFACE	THR COORDINATES	BEARING STRENGTH	TODA	TODA / ASDA	LDA
05	052°	1800X45	ASPH	53°06'53.88"N 006°34'08.85"E	PCN 55/F/A/X/T	1800	1800	1800
23	232°	1800X45	ASPH	53°07'29.84"N 006°35'24.96"E	PCN 55/F/A/X/T	1800	1800	1800
01	009°	1500X45	ASPH	53°07'02.59"N 006°34'36.69"E	PCN 55/F/A/X/T	1500	1500	1500
19	189°	1500X45	ASPH	53°07'50.54"N 006°34'48.97"E	PCN 55/F/A/X/T	1500	1500	1500

**LEGEND**

- RWY HOLDING POSITION MARKING, PATTERN A
- WIND DIRECTION INDICATOR
- RVR
- APRON LIGHT

metres 0 100 200 300 400 500  
feet 0 500 1000 1500

VAR 0°12' W 2005  
ANNUAL RATE  
OF CHANGE 6" E

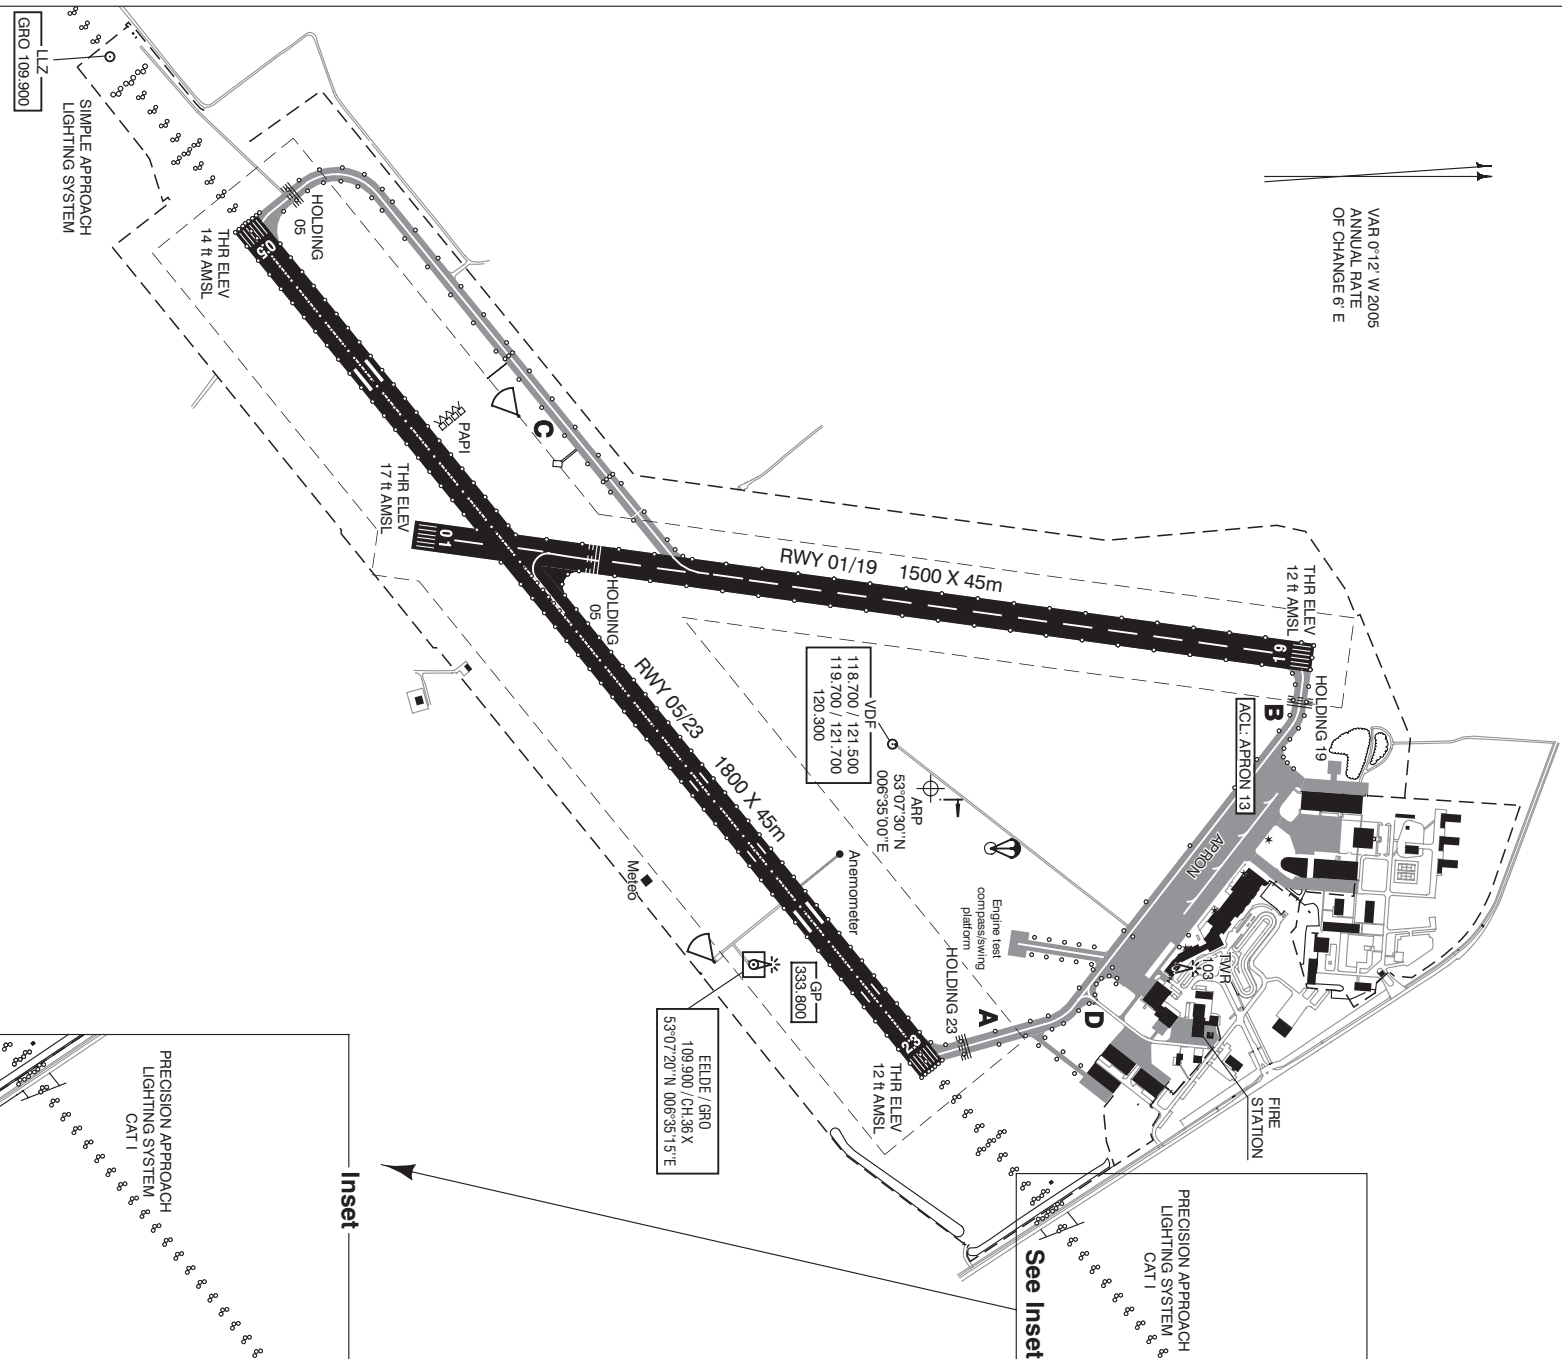

See Inset

Inset

